

STOCK
CLEARANCE

SALE

ONLY AS LONG AS STOCK LASTS



KITO EQ ELECTRIC CHAIN HOIST

CAPACITY: 125 KG – 1.000 KG
SINGLE SPEED VERSION

- Compact and strong.
- Economical and lightweight.
- High-performance mechanical brake.
- World-class KITO Original Load Chain.
- Counter hour meter.
- IP55 dust and water jet proof body.

EMAIL: SALES@ORYXLIFTING.COM
TEL.: +971 58 560 9559

ORYX
LIFTING





UP TO TWO MILLION INSERTIONS PULL-ROTOR BRAKE

The chain hoist has an extremely durable cylinder anchor brake, which has already proven to be very reliable in the past. As expected, up to two million operations can be performed.

CONCENTRATION ON THE MOST IMPORTANT THINGS LOW MAINTENANCE

The EQ electric chain hoist is equipped without a transformer, electromagnetic contactors and electromagnetic brakes. This means less maintenance work for you. There is no wear on the mechanical parts.

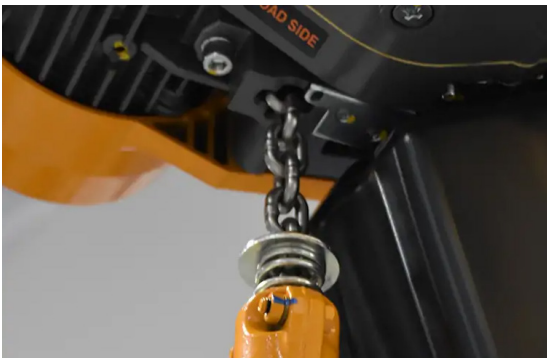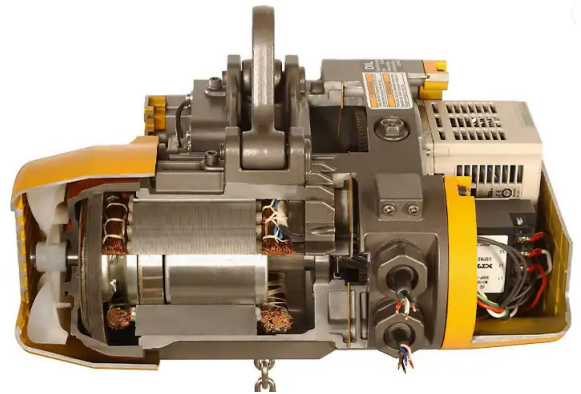

CORROSION-RESISTANT AND LOW-WEAR NICKEL-PLATED LOAD CHAIN

KITO is the only manufacturer in the world to nickel-plate its load chain in an electroless process. The advantage of this process are higher corrosion resistance and less wear compared to conventional load chains. The nickel-plated load chain grade T, DAT 800 N/mm² version is standard on KITO electric chain hoists.

UNCOMPROMISING SAFETY HIGH FEM CLASSIFICATION

- Up to 500 kg load capacity FEM 3m / ISO M6
- 1,000 kg load capacity FEM 2m / ISO M5
- High durability and reliability.

